




1101 McKinley Street  
Anoka, MN 55303  
Phone (763) 786-6682  
Fax (763) 786-2167  
[www.polycam.com](http://www.polycam.com)

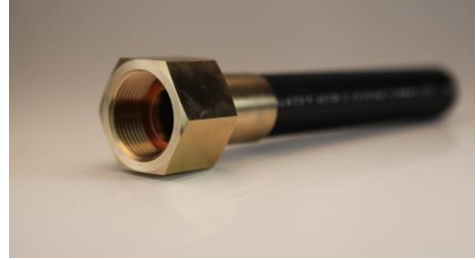

Part Name: Female Flare Swivel Transition  
Part Number: 914-xxxx

### **Product Specifications:**

- Fully pressure rated to pipe SDR installed (160PSI, 200PSI)
- ASTM 1598 and ASTM 1599
- Material complies with California AB1953, SB1334 and SB1935.
- Requires a copper gasket.
- Meets NSF 61, listing PM13570
- Can be made with CTS pipe. Call for details.

# Series 914 Female Flare Swivel Transition

Flare Size	Poly-Cam Male Flare Material	Coupling Hex Diameter <b>A</b>	Coupling Length <b>B</b>	HDPE Length <b>C</b>	HDPE Diameter Size <b>D</b>
0.75	C954	1.5	1.98	4	1.050
1	C954	1.75	2.77	4	1.315
1.25	C954	2.25	2.33	5	1.660
1.5	C954	2.75	3.30	5	1.900
2	C954	3.5	3.20	5	2.375

